



Reference guide for commonly specified sheet and roll goods.

ABSORBERS


Application: To dissipate noise energy and reduce

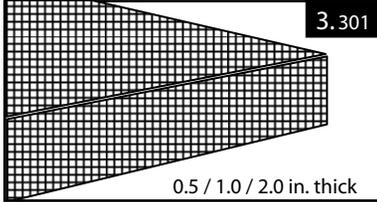


Conasorb F – Flexible polyurethane foam.

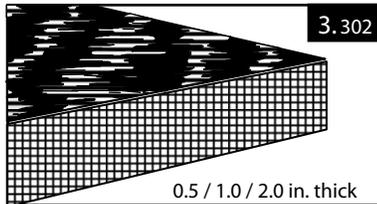


Conasorb UF – Polyurethane foam with black urethane film cover.

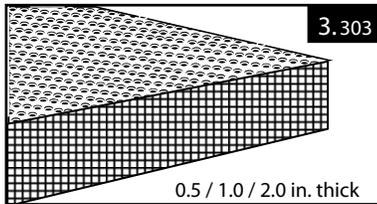

Conasorb V – Polyurethane foam with attractive perforated vinyl cover.

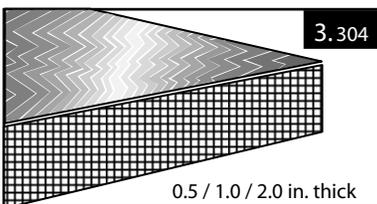


Conasorb FTMM – Polyurethane foam with a metallized mylar film cover.

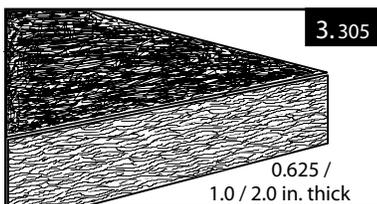


AcoustiGuard™ ML – Rigid fiberglass board with a mat black non-woven glass cover.

BARRIERS

Application: To block the transmission of noise.

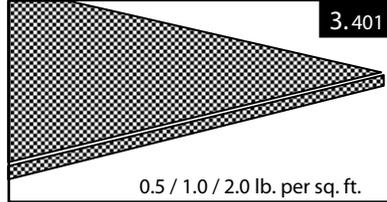

Barymat 5 – Thin, flexible, plain noise barrier material.

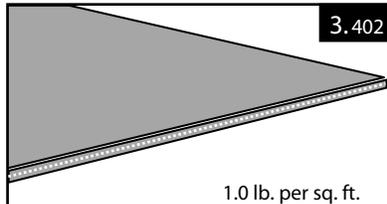

AcoustiGuard™ RB – Flexible, loaded barrier material reinforced with a fiberglass scrim.

Technical data sheets and application assistance available for all products.


(Request by product sheet number indicated)

Contact direct,


WILREP LTD.
 1515 Matheson Blvd. E., Unit C-10
 Mississauga, Ontario, Canada L4W 2P5
 Tel. (905)625-8944
 Fax (905)625-7142
 www.wilrep.com
 e-mail: wilrep@direct.com

COMPOSITES


Application: To decouple a barrier from the noise source or structure and provide an absorptive layer where required.

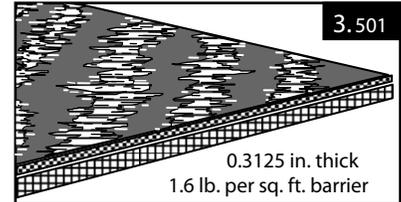


Barymat BM-1C – Flexible barrier with polyester cover and foam decoupler.

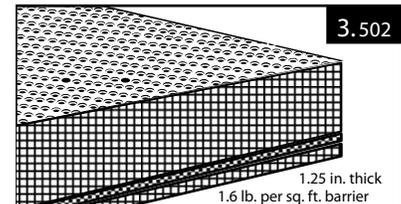

Barymat BV-14C – Noise barrier / absorption material with perforated vinyl cover and foam decoupler.

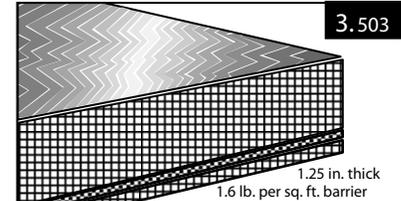

Barymat BTMM-14C – Noise barrier / absorption material with metallized mylar cover and foam decoupler.

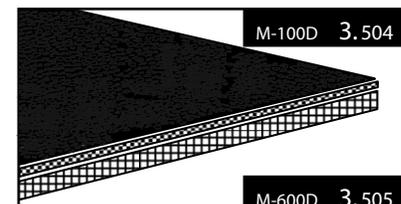

Barymat M-100D – 1.0 lb. per sq. ft. barrier with embossed vinyl wear surface and 0.25 in. foam decoupler.

Barymat M-600D – 2.0 lb. per sq. ft. barrier with embossed vinyl wear surface and 0.375 in. closed cell foam decoupler.

M-600D 3.505