


OPTIONAL PANEL INSTALLATION

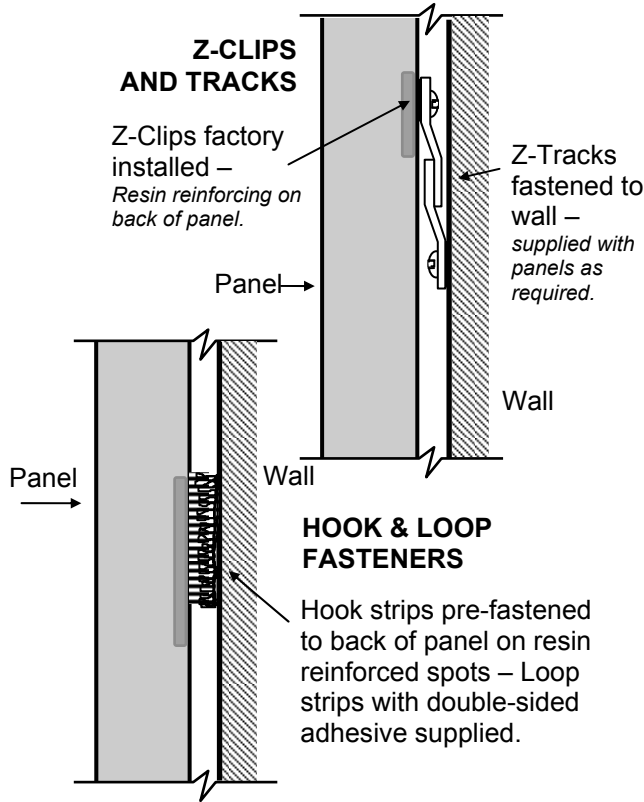

PERFORMANCE DATA

Absorption Coefficient

Frequency (Hz)	1" Thick Fiberglass Fabric Finish	1" Thick Fiberglass Vinyl Finish (18% Perf.)
200	0.195	0.214
250	0.333	0.302
315	0.381	0.352
450	0.438	0.473
500	0.687	0.648
630	0.820	0.797
800	0.916	0.888
1000	0.955	0.842
1250	1.044	1.032
1600	1.068	1.030
2000	1.094	1.053
2500	1.003	0.967
3150	0.897	0.874
4000	0.877	0.854
5000	0.883	0.879
NRC	0.75	0.75

FLAMMABILITY

DAP Fabric and Vinyl finish panels are CLASS A, non-combustible as defined by ASTM E-84.

For complete application assistance contact direct,

WILREP LTD.
 1515 Matheson Blvd. E., Unit C-10
 Mississauga, Ontario, Canada L4W 2P5
Tel. (905)625-8944 Fax (905)625-7142
www.wilrep.com e-mail: wilrep@idirect.com