


Tri-Wedge 8000

MACHINERY MOUNT



Two height ranges in a single three piece wedge mount.

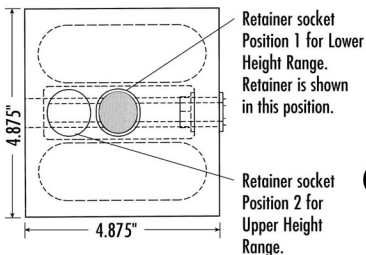

LOWER HEIGHT RANGE

Min. Height

1.39"

Max. Height

1.72"

UPPER HEIGHT RANGE

Min. Height

1.57"

Max. Height

1.89"

Fine Adjustment wedge mount with vibration pad top and bottom. This heavy duty mount utilizes two stationary wedges and one sliding wedge to provide mechanical lift for the mount. Each mount is capable of two simple height range adjustments.

- ▶ Provides true vertical lift.
- ▶ Heavy duty machinery mount system.
- ▶ Two height ranges in one mount.
- ▶ Easily accessible slide adjustment.
- ▶ Use with any precision machinery that requires both levelling and vibration isolation.
- ▶ Anchor bolts not required.
- ▶ Pads are removable.

SPECIFICATIONS

Length	4.875"
Width	4.875"
5/16" Adjustment Range	
Lower Height Range	
Min. Height	1.39"
Max. Height	1.72"
Upper Height Range	
Min. Height	1.57"
Max. Height	1.89"

* Note: Heights shown above are for mount only. Add .375" per pad (no load)

UNISORB
INSTALLATION TECHNOLOGIES